

BAC 160

01001201-xxx OLI-1



*Photo for illustrative purposes

Insulated container standard specifications

Box & lid :

- Monobloc wall in UV-resistant food grade polyethylene ;
- Injected polyurethane foam ;
- Monobloc silicone frame seal ;
- Sealing frontal toggle closure, yellow zinc coating ;
- Lid opening at 115°;
- 4 side-handling handles rotationally molded into the mass ;
- Mass-produced boss for stacking ;
- Maximum capacity of storable pellets : ≈ 120 kg

Accessory options

- Brakes :** set of 2 polyamide sandwich wheels with brakes, diameter 125 mm (see user guide) ;
- Feet :** set of 4 metal feet.


Customization

- Signage :** heat-sealed adhesive – ready-to-print file provided by the client.
- Tracking :** temperature/GPS tracking solution.
- Branding marking :** engraved aluminum plate 150 x 90 mm

Cold source

ADVICES

Eutectic plates : up to 2 eutectic plates TOP370 all temperature according to the existing Olivo standard.

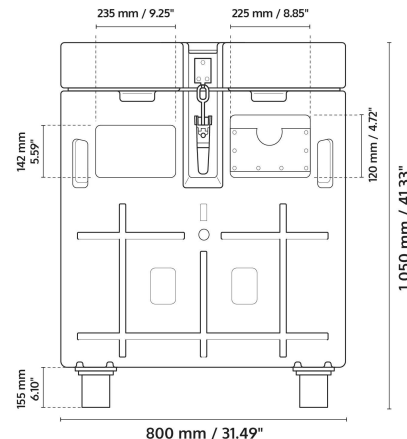

Insulated container properties

Property	Value
Coef K	0.32 W/m2.°C
ATP category	IR
Temperature resistance	-80°C/+70°C
Double wall thickness	≈ 100 mm
Internal convection grooves	

Property	Value
Dynamic load capacity	600 Kg
Static load capacity	1200 Kg

Double-walled, rotational-molded and grooved

For advice on best practices for use and thermal performance, contact the Olivo team / contact@olivo.eu



Update 26 /10/2023

External dimensions (L x l x h)

800 x 600 x 1050 mm"

Internal dimensions* (L x l x h)

595 x 385 x 695 mm

Internal volume

159 L

Empty weight

50 Kg

Logistical specifications

Half-Euro pallet 600 x 800 mm

* Average value for reference purposes



Chilled

Frozen

Ambient

olivo
cold logistics

1 bld des Mineurs 42230 Roche-la-Molière / www.olivo.eu