

Roll 1100

01002020-xxx OLI-1



*Photo for illustrative purposes

External dimensions (L x l x h)

1000 x 1200 x 1720 mm

Internal dimensions (L x l x h)

805 x 1000 x 1365 mm

Internal volume

1092 L

Empty weight

144 Kg

Cold source - advices

Eutectic plate : up to 4 eutectic plates TOP370 all temperature according to the existing Olivo standard.

Dry ice drawer : capacity of 46L, made of aluminium.

SIBER bac : rotomoulded dry ice injection container, mixed chilled and frozen.



Insulated container standard specifications

Box & door :

- Monobloc wall in UV-resistant food-grade polyethylene ;
- Injected polyurethane foam ;
- Monobloc EPDM frame seal ;
- Sealed lateral Pelican® closure, yellow zinc coating ergonomic handling sheath, 2 locking points, and 1 galvanized door stop ;
- 270° door opening ;
- Double-axis zinc-plated box-door hinge ;
- 2 side-handling handles rotationally molded into the mass ;
- 1 injected plastic intermediate grid, 2 liftable and foldable panels.

Logistical specifications : ISO pallet 1200 x 1000 mm

Chassis :

- Embedded support frame with yellow zinc coating ;
- 2 swivel wheels, 2 fixed sandwich polyamide noise-reducing wheels attached to a plate, diameter 125 mm and height 155 mm.

Accessory options

Brakes : set of 2 polyamide sandwich wheels with brakes, diameter 125 mm (see User Guide);

Feet : set of 4 metal feet, diameter 80 mm ;

Customization

Signage : heat-sealed adhesive – ready-to-print file provided by the client.

Tracking : temperature/GPS tracking solution.

Logo molded into the mass.

Branding marking : engraved aluminum plate 150 x 90 mm

* Average value for reference purposes



Chilled



Frozen



Ambient




HDPE



ATP



Fork

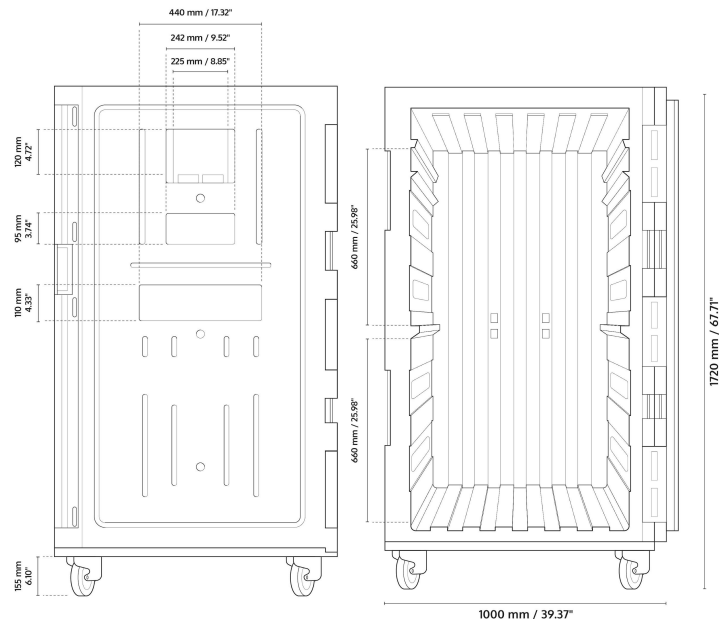

Insulated container properties

Thermal	Coef K.	0.34 W/m2.°C
	ATP category	IR
	Temperature resistance	-80°C/+70°C
	Double wall thickness	≈ 80 mm
Mechanical	Internal convection grooves	
	Dynamic load capacity	600 Kg
	Static load capacity	1200 Kg
Double-walled, rotational-molded and grooved		

For advice on best practices for use and thermal performance, contact the Olivo team / contact@olivo.eu ■ Update 26/10/2023

1 bld des Mineurs 42230 Roche-la-Molière - www.olivo.eu