

Roll 1300

01002021-xxx OLI-1



**Photo for illustrative purposes*

External dimensions [L x l x h]

1100 x 1100 x 1930 mm

Internal dimensions* [L x l x h]

900 x 910 x 1570 mm

Internal volume

1285 L

Empty weight

156 Kg

Cold source - advices

Eutectic plate : up to 4 eutectic plates TOP370 all temperature according to the existing Olivo standard.

Dry ice drawer : capacity of 40L, made of aluminium.

SIBER bac : rotomoulded dry ice injection container, mixed chilled and frozen.



Insulated container standard specifications

Box & door :

- Monobloc wall in UV-resistant food-grade polyethylene ;
- Injected polyurethane foam ;
- Monobloc EPDM frame seal ;
- Sealed lateral Pelican® closure, yellow zinc coating ergonomic handling sheath, 2 locking points, and 1 galvanized door stop ;
- 270° door opening ;
- Double-axis zinc-plated box-door hinge ;
- 2 side-handling handles rotationally molded into the mass ;

Logistical specifications : Asia pallet 1100 x 1100 mm

Chassis :

- Embedded support frame with yellow zinc coating ;
- 2 swivel wheels, 2 fixed sandwich polyamide noise-reducing wheels attached to a plate, diameter 125 mm and height 155 mm.

Accessory options

Brakes : set of 2 polyamide sandwich wheels with brakes, diameter 125 mm User Guide);

Feet : set of 4 metal feet, diameter 80 mm;

Intermediate grid : up to 3 steel grids with polyamide coating or stainless steel ;

Customization

Signage : heat-sealed adhesive – ready-to-print file provided by the client.

Tracking : temperature/GPS tracking solution.

Logo molded into the mass.

Branding marking : engraved aluminum plate 150 x 90 mm

** Average value for reference purposes*



Chilled



Frozen



Ambient




HDPE



ATP



Food safe

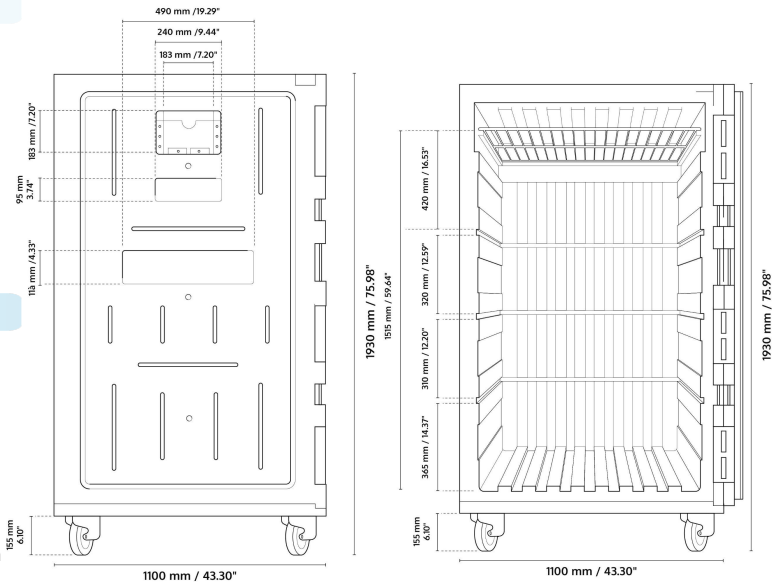

Insulated container properties

Thermal

Coef K.	0.31 W/m2.°C
ATP category	IR
Temperature resistance	-80°C/+70°C
Double wall thickness	≈ 80 mm
Internal convection grooves	

Mechanical

Dynamic load capacity	600 Kg
Static load capacity	1200 Kg
Double-walled, rotational-molded and grooved	

For advice on best practices for use and thermal performance, contact the Olivo team / contact@olivo.eu ■ Update 26/10/2023