

# Roll 1410

01002027-xxx OLI-1



*\*Photo for illustrative purposes*

## External dimensions [L x l x h]

1000 x 1200 x 2000 mm

## Internal dimensions\* [L x l x h]

805 x 1050 x 1680 mm

## Internal volume

1420 L

## Empty weight

170 Kg

## Cold source - advices

**Eutectic plate** : up to 4 eutectic plate TOP370 all temperature according to the existing Olivo standard.

**Dry ice drawer** : capacity of 46L, made of aluminium.

**SIBER bac** : rotomoulded dry ice injection container, mixed chilled and frozen.



## Insulated container standard specifications

### Box & door :

- **Monobloc wall** in UV-resistant food-grade polyethylene ;
- **Injected polyurethane foam** ;
- **Monobloc EPDM frame seal** ;
- **Sealed lateral Pelican® closure**, yellow zinc coating, ergonomic handling sheath, 2 locking points, and 1 galvanized door stop ;
- **270° door opening** ;
- **Double-axis zinc-plated box-door hinge** ;
- **2 side-handling handles** rotationally molded into the mass ;

Logistical specifications : ISO pallet 1200 x 1000 mm

### Chassis :

- **Embedded support frame** with yellow zinc coating ;
- **9 metal feet**, diameter 80 mm ;

## Accessory options

**Intermediate grid** : up to 2 steel grids with polyamide coating or stainless steel ;


## Customization

**Signage** : heat-sealed adhesive – ready-to-print file provided by the client.

**Tracking** : temperature/GPS tracking solution.

**Branding marking** : engraved aluminum plate 150 x 90 mm

*\* Average value for reference purposes*

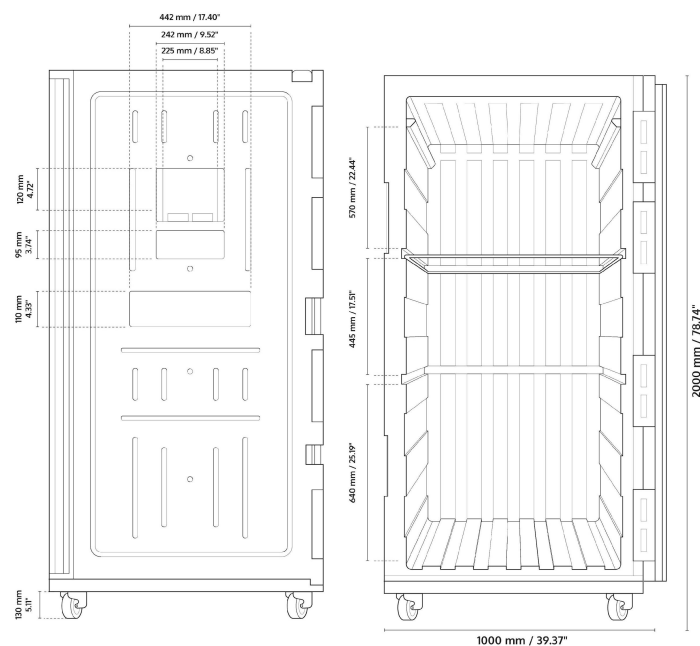

## Insulated container properties

Coef K. 0.33 W/m2.°C  
ATP category IR  
Temperature resistance -80°C/+70°C  
Double wall thickness ≈ 100 mm  
Internal convection grooves

Static load capacity - Kg

Double-walled, rotational-molded and grooved

For advice on best practices for use and thermal performance, contact the Olivo team / [contact@olivo.eu](mailto:contact@olivo.eu) ■ Update 26/10/2023

1 bld des Mineurs 42230 Roche-la-Molière - [www.olivo.eu](http://www.olivo.eu)