

Roll 220

01002009-xxx OLI-1



*Photo for illustrative purposes

External dimensions [L x l x h]

600 x 800 x 1130 mm

Internal dimensions* [L x l x h]

430 x 610 x 820 mm

Internal volume

215 L

Empty weight

60 Kg

Cold source - advices

Eutectic plate : up to 2 eutectic plates TOP370 all temperature according to the existing Olivo standard.

Dry ice drawer : capacity of 14L, made of aluminium.

SIBER bac : dry ice injection container.



Insulated container standard specifications

Box & door :

- **Monobloc wall** in UV-resistant food-grade polyethylene ;
- **Injected polyurethane** foam ;
- **Monobloc EPDM** frame seal ;
- **Sealed lateral Pelican® closure**, yellow zinc coating, ergonomic handling sheath, 1 locking point, and 1 galvanized door stop ;
- **270° door opening** ;
- **Double-axis zinc-plated** box-door hinge ;
- **2 side-handling handles** rotationally molded into the mass.

Logistical specifications : Half-Euro pallet 800 x 600 / Euronorme crate 600 x 400

Chassis :

- **Embedded support frame** with yellow zinc coating ;
- **2 swivel wheels**, **2 fixed sandwich** polyamide noise-reducing wheels attached to a plate, diameter 100 mm and height 128 mm.

Accessory options

Brakes : set of 2 polyamide sandwich wheels with brakes, diameter 3.93" (see User Guide) ;

Feet : set of 4 metal feet, diameter 60 mm ;

Shelf : 1 intermediate grid, steel with polyamide or stainless steel coating, with or without anti-fall edges. Provided with 2 fixing legs. Thermometer location in the crate

Customization

Signage : heat-sealed adhesive – ready-to-print file provided by the client.

Tracking : temperature/GPS tracking solution.

Branding marking : engraved aluminium plate 150 x 90 mm

* Average value for reference purposes




Chilled



Frozen



Ambient

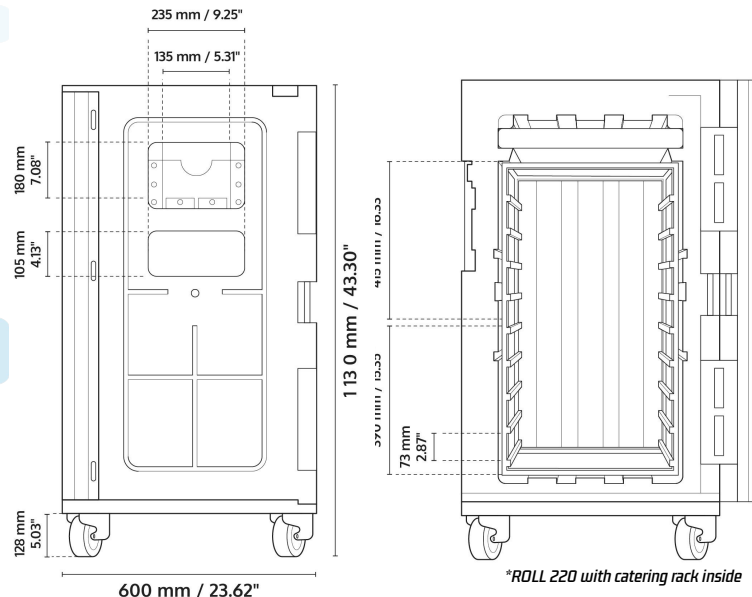

*ROLL 220 with catering rack inside

Insulated container properties

Thermal

Coef K.	0.38 W/m ² .°C
ATP category	IR
Temperature resistance	-80°C/+70°C
Double wall thickness	≈ 85 mm
Internal convection grooves	

Mechanical

Dynamic load capacity	480 Kg
Static load capacity	960 Kg
Double-walled, rotational-molded and grooved	

For advice on best practices for use and thermal performance, contact the Olivo team / contact@olivo.eu

■ Update 26/10/2023