

Roll 300

01002018-xxx OLI-1



*Photo for illustrative purposes

External dimensions (L x l x h)

695 x 805 x 1135 mm

Internal dimensions* (L x l x h)

560 x 630 x 850 mm

Internal volume

299 L

Empty weight

64 Kg

Cold source - advices

Eutectic plate : up to 4 eutectic plates TOP580 all temperature according to the existing Olivo standard.

Insulated container standard specifications

Box & door :

- **Monobloc wall** in UV-resistant food-grade polyethylene ;
- **Injected polyurethane** foam ;
- **Monobloc EPDM** frame seal ;
- **Sealed lateral Pelican® closure**, yellow zinc coating, ergonomic handling sheath, 1 locking point, and 1 galvanized door stop ;
- **270° door opening** ;
- **Double-axis zinc-plated** box-door hinge ;

Chassis :

- **Embedded support frame** with yellow zinc coating ;
- **2 swivel wheels**, **2 fixed sandwich** polyamide noise-reducing wheels attached plate, diameter 100 mm and height 128 mm'.

Accessory options

Brakes : set of 2 polyamide sandwich wheels with brakes, diameter 100 mm (see User Guide) ;

Feet : set of 4 metal feet, diameter 60 mm ;


Customization

Signage : heat-sealed adhesive – ready-to-print file provided by the client.

Tracking : temperature/GPS tracking solution.

Branding marking : engraved aluminum plate 150 x 90 mm

* **Average value for reference purposes**

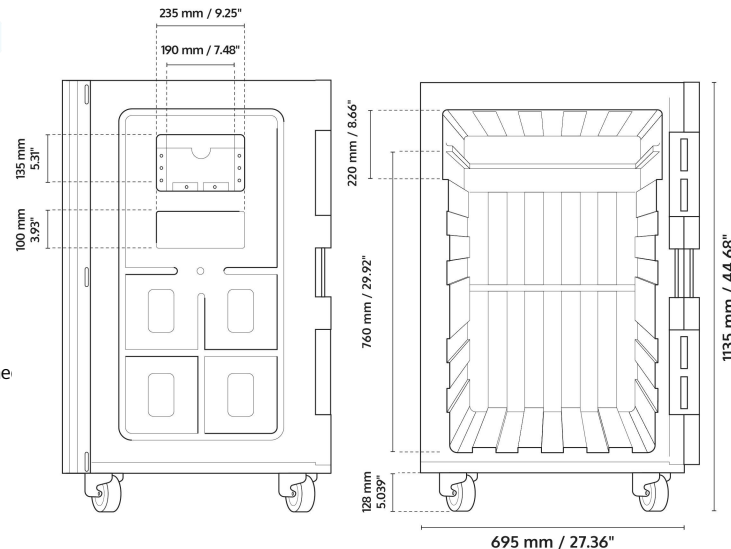

Insulated container properties

Thermal	Coef K.	0.48 W/m2.°C
	ATP category	IN
	Temperature resistance	-80°C/+70°C
	Double wall thickness	≈ 70 mm
Mechanical	Internal convection grooves	
	Dynamic load capacity	480 Kg
	Static load capacity	960 Kg
Double-walled, rotational-molded and grooved		

For advice on best practices for use and thermal performance, contact the Olivo team / contact@olivo.eu

■ Update 26/10/2023

1 bld des Mineurs 42230 Roche-la-Molière - www.olivo.eu