

Roll 670 SEA

01002017-xxx OLI-1



*Photo for illustrative purposes

External dimensions [L x l x h]

800 x 1030 x 1720 mm

Internal dimensions* [L x l x h]

610 x 865 x 1280 mm

Internal volume

675 L

Empty weight

130 Kg

Cold source - advices

Eutectic plate : up to 1 eutectic plate TOP780 all temperature according to the existing Olivo standard.

Insulated container standard specifications

Box & door :

- **Monobloc wall** in UV-resistant food-grade polyethylene ;
- **Injected polyurethane** foam ;
- **Monobloc EPDM** frame sea l ;
- **Sealed lateral Pelican® closure**, yellow zinc coating, ergonomic handling sheath, 2 locking points, and 1 galvanized door stop ;
- **270° door opening** ;
- **Double-axis zinc-plated** box-door hinge ;
- **2 side-handling handles** rotationally molded into the mass ;
- **Stainless steel drain plug for water drainage** and special rotomolded bottom for water retention ;
- **2 three-panel stainless steel grids**, liftable and foldable. Fixed on the rear wall ;
- Side label holder.

Chassis :

- **Embedded support frame** with yellow zinc coating ;
- **2 swivel wheels**, **2 fixed sandwich** polyamide noise-reducing wheels attached to a plate, diameter 100 mm and height 128 mm.

Accessory options

Brakes : set of 2 polyamide sandwich wheels with brakes, diameter 100 mm (see User Guide) ;

Feet : set of 4 metal feet, diameter 60 mm ;

Customization

Signage : heat-sealed adhesive – ready-to-print file provided by the client.

Tracking : temperature/GPS tracking solution.

Branding marking : engraved aluminum plate 150 x 90 mm ;

* **Average value for reference purposes**




Chilled



Frozen



Ambient

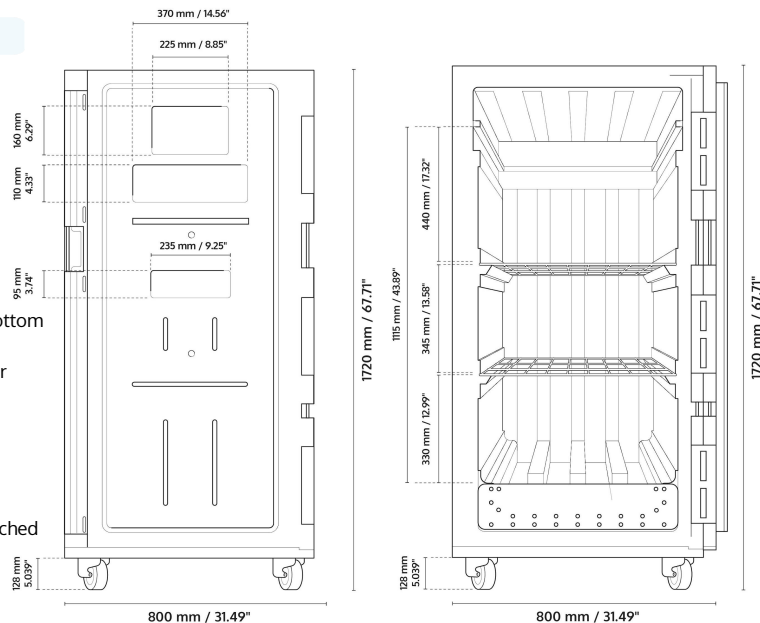

Insulated container properties

Coef K.	0.33 W/m ² .°C
ATP category	IR
Temperature resistance	-80°C/+70°C
Double wall thickness	≈ 95 mm
Internal convection grooves	

Dynamic load capacity	480 Kg
Static load capacity	960 Kg

Double-walled, rotational-molded and grooved

For advice on best practices for use and thermal performance, contact the Olivo team / contact@olivo.eu ■ Update 26/10/2023

1 bld des Mineurs 42230 Roche-la-Molière - www.olivo.eu