

Roll 780 SEA

01002015-xxx OLI-1



*Photo for illustrative purposes

External dimensions (L x l x h)

800 x 1000 x 1900 mm

Internal dimensions (L x l x h)

610 x 820 x 1420 mm

Internal volume

710 L

Empty weight

137 Kg

Cold source - advices

Eutectic plate : up to 4 eutectic plates TOP780 all temperature according to the existing Olivo standard.

Insulated container standard specifications

Box & door :

- Monobloc wall in UV-resistant food-grade polyethylene ;
- Injected polyurethane foam ;
- Monobloc EPDM frame seal ;
- Sealed lateral Pelican® closure, yellow zinc coating, ergonomic handling sheath, 2 locking points, and 1 galvanized door stop ;
- 270° door opening ;
- Double-axis zinc-plated box-door hinge ;
- 2 side-handling handles rotationally molded into the mass ;
- Stainless steel drain plug for water drainage and special rotomolded bottom for water retention.

Logistical specifications : Euronorm crate 600 x 400 mm

Chassis :

- Embedded support frame with yellow zinc coating ;
- 2 swivel wheels, 2 fixed sandwich polyamide noise-reducing wheels attached to a plate, diameter 125 mm and height 155 mm.

Accessory options

Brakes : set of 2 polyamide sandwich wheels with brakes, diameter 125 mm (see User Guide);

Feet : set of 4 metal feet, diameter 80 mm ;

Intermediate grid : up to 3 steel grids with polyamide coating or stainless steel ;

Customization

Signage : heat-sealed adhesive – ready-to-print file provided by the client.

Tracking : temperature/GPS tracking solution.

Logo molded into the mass.

Branding marking : engraved aluminum plate 150 x 90 mm

* Average value for reference purposes




Chilled



Frozen



Ambient

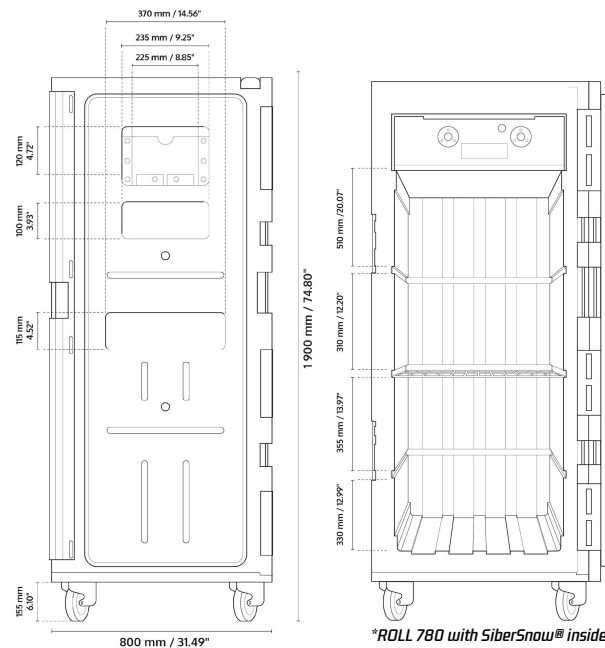

*ROLL 780 with SiberSnow® inside

Insulated container properties

Thermal

Coef K.	0.33 W/m2.°C
ATP category	IR
Temperature resistance	-80°C/+70°C
Double wall thickness	≈ 90 mm
Internal convection grooves	

Mechanical

Dynamic load capacity	600 Kg
Static load capacity	1200 Kg

Double-walled, rotational-molded and grooved

For advice on best practices for use and thermal performance, contact the Olivo team / contact@olivo.eu ■ Update 26/10/2023

1 bld des Mineurs 42230 Roche-la-Molière - www.olivo.eu