

# Roll O' CITY

01001600-xxx OLI-1



\*Photo for illustrative purposes

## External dimensions (L x l x h)

800 x 1200 x 1270 mm

## Internal dimensions (L x l x h)

610 x 940 x 900 mm

## Internal volume

516 L

## Empty weight

74 Kg

## Cold source - advices

**Eutectic plates** : up to 4 eutectic plates TOP900 all temperature according to the existing Olivo standard. With or without plate support, depending on the amount of cold needed.



## Insulated container standard specifications

### Box & door :

- Monobloc wall in UV-resistant expanded food-grade polypropylene ;
- EPDM seal ;
- Sealed frontal closure, 3 locking points, door stop system with magnet ;
- 270° door opening ;
- 2 rear handling handles ;

Logistical specifications : Euro pallet 800 x 1 200 mm

### Chassis :

- Embedded support frame anti-corrosion coated steel ;
- 2 swivel wheels, 2 fixed sandwich polyamide noise-reducing wheels attached to a plate, diameter 100 mm and height 128 mm ;

## Accessory options

**Brakes** : set of 2 polyamide sandwich wheels with brakes, diameter 100 mm (see User Guide) ;

**Cargo bike** : Bicylift compatibility kit mounted on chassis ;


**Shelf** : 1 intermediate grid, polyamide-coated steel or stainless steel.

## Customization

**Signage** : Alu dibond 3 mm, 1000 x 800 mm - ready-to-print file provided by the client.

**Tracking** : Temperature/geolocation tracking solution ;

**Branded marking** : Engraved aluminum plate 150 x 90 mm ;

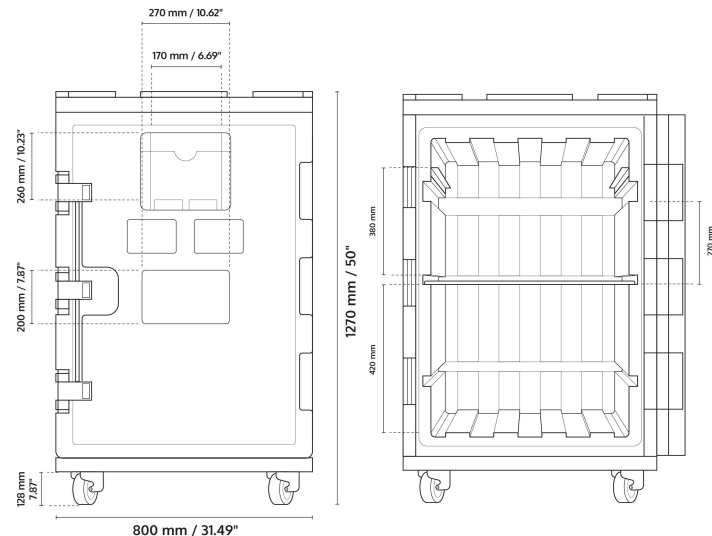

## Insulated container properties

Thermal	Coef K.	0.34 W/m2.°C
	ATP category	IR
	Temperature resistance	-80°C/+70°C
	Double wall thickness	≈ 95 mm
Mechanical	Dynamic load capacity	480 Kg
	Static load capacity	960 Kg

For advice on best practices for use and thermal performance, contact the Olivo team / [contact@olivo.eu](mailto:contact@olivo.eu)

■ Update 26/10/2023