

# BAC 320

01001204-xxx OLI-1



*\*\*Photo for illustrative purposes*

## External dimensions (L x l x h)

1200 x 800 x 965 mm

## Internal dimensions\* (L x l x h)

985 x 590 x 575 mm

## Internal volume

327 L

## Empty weight

90 Kg

## Logistical specifications

Euro pallet 800 x 1200 mm

*\* Average value for reference purposes*



Chilled



Frozen



Ambient



1 bld des Mineurs 42230 Roche-la-Molière / [www.olivo.eu](http://www.olivo.eu)

## Insulated container standard specifications

### Box & Lid :

- Monobloc wall in UV-resistant food-grade polyethylene ;
- Injected polyurethane foam ;
- Monobloc silicone frame seal ;
- 2 sealable front toggle closures, ergonomic handling sheath, yellow zinc coating ;
- Zinc-plated box-door hinge ;
- 80° lid opening assisted by gas struts ;
- 2 side-handling handles, 2 front-handling handles rotationally molded into the mass ;
- Stainless steel cable drain plug ;
- 4 metallic stacking lugs on the lid ;
- Maximum capacity of storable pellets : ≈ 250 kg.

### Chassis :

- Embedded support frame with yellow zinc coating and filmogenic treatment ;
- 2 swivel wheels, 2 fixed sandwich polyamide noise-reducing wheels attached to a plate, diameter 125 mm and height 155 mm ;

## Accessory options

**Brakes :** set of 2 polyamide sandwich wheels with brakes, diameter 125 mm (see user guide) ;

**Feet :** set of 4 metal feet diameter 80 mm

## Customization

**Signage :** heat-sealed adhesive – ready-to-print file provided by the client.

**Tracking :** temperature/GPS tracking solution.


**Logo molded into the mass.**

**Branding marking :** engraved aluminum plate 150 x 90 mm

## Cold source

### ADVICES

**Eutectic plates :** up to 2 eutectic plates TOP370 all temperature according to the existing Olivo standard.

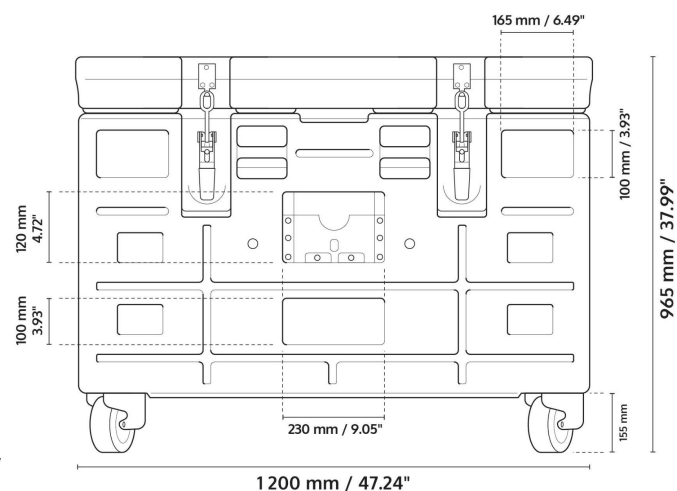

## Insulated container properties

Thermal  
Mechanical

Coef K.	0.35 W/m2.°C
ATP category	IR
Temperature resistance	-80°C/+70°C
Double wall thickness	≈ 100 mm
Internal convection grooves	

Dynamic load capacity	600 Kg
Static load capacity	1200 Kg

Double-walled, rotational-molded and grooved



Update 26 /10/2023