

BAC 420

01001200-xxx OLI-1



*Photo for illustrative purposes

Insulated container standard specifications

Box & Lid :

- **Monobloc wall** in UV-resistant food-grade polyethylene ;
- Injected polyurethane foam ;
- **Monobloc silicone frame seal** ;
- **2 sealable front toggle closures**, ergonomic handling sheath, yellow zinc coating ;
- **Zinc-plated box-door hinge** ;
- **80° lid opening** assisted by gas struts ;
- **2 side-handling handles**, 2 front-handling handles rotationally molded into the mass ;
- **Stainless steel cable drain plug** ;
- **4 metallic stacking lugs** on the lid ;

Chassis :

- **Embedded support frame** with yellow zinc coating and filmogenic treatment ;
- **2 swivel wheels**, **2 fixed sandwich** polyamide noise-reducing wheels attached to a plate, diameter 125 mm and height 155 mm ;

Accessory options

Brakes : set of 2 polyamide sandwich wheels with brakes, diameter 125 mm (see user guide)

Feet : set of 4 metal feet diameter 80 mm.

Customization

Signage : heat-sealed adhesive – ready-to-print file provided by the client.

Tracking : temperature/GPS tracking solution.


Logo molded into the mass.

Branding marking : engraved aluminium plate 150 x 90 mm

Cold source

ADVICES

Eutectic plates : up to 2 eutectic plates TOP900 all temperature according to the existing Olivo standard.

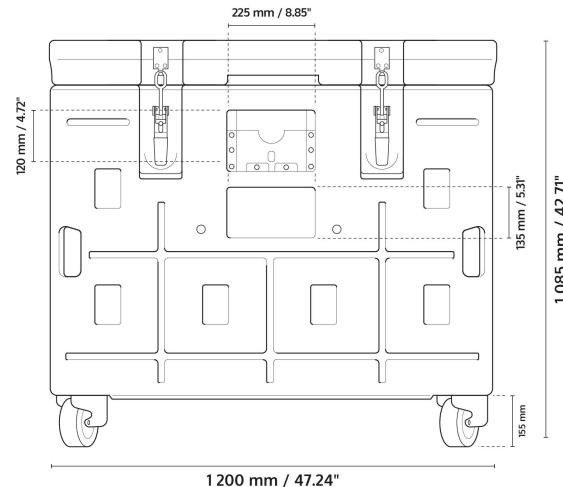

Insulated container properties

Thermal

Coef K.	0.33 W/m2.°C
ATP category	IR
Temperature resistance	-80°C/+70°C
Double wall thickness	≈ 90 mm
Internal convection grooves	

Mechanical

Dynamic load capacity	600 Kg
Static load capacity	1200 Kg

Double-walled, rotational-molded and grooved

External dimensions (L x l x h)

1200 x 800 x 1100 mm

Internal dimensions* (L x l x h)

1000 x 600 x 695 mm

Internal volume

417 L

Empty weight

98 Kg

Logistical specifications

Euro pallet 800 x 1200 mm

* Average value for reference purposes



Chilled

Frozen

Ambient



1 bld des Mineurs 42230 Roche-la-Molière / www.olivo.eu



Update 26 /10/2023