

Roll 1100

01002020-xxx OLI-1



**Photo for illustrative purposes*

External dimensions (L x l x h)

1000 x 1200 x 1720 mm

Internal dimensions (L x l x h)

805 x 1000 x 1365 mm

Internal volume

1092 L

Empty weight

144 Kg

Cold source - advices

Eutectic plate : up to 4 eutectic plates TOP370 all temperature according to the existing Olivo standard.

Dry ice drawer : capacity of 46L, made of aluminium.

SIBER bac : rotomoulded dry ice injection container, mixed chilled and frozen.



Insulated container standard specifications

Box & door :

- **Monobloc wall** in UV-resistant food-grade polyethylene ;
- **Injected polyurethane foam** ;
- **Monobloc EPDM frame seal** ;
- **Sealed lateral Pelican® closure**, yellow zinc coating ergonomic handling sheath, 2 locking points, and 1 galvanized door stop ;
- **270° door opening** ;
- **Double-axis zinc-plated box-door hinge** ;
- **2 side-handling handles** rotationally molded into the mass ;
- **1 injected plastic intermediate grid**, 2 liftable and foldable panels.

Logistical specifications : ISO pallet 1200 x 1000 mm

Chassis :

- **Embedded support frame** with yellow zinc coating ;
- **2 swivel wheels**, **2 fixed sandwich** polyamide noise-reducing wheels attached to a plate, diameter 125 mm and height 155 mm.

Accessory options

Brakes : set of 2 polyamide sandwich wheels with brakes, diameter 125 mm (see User Guide);

Feet : set of 4 metal feet, diameter 80 mm ;

Customization

Signage : heat-sealed adhesive – ready-to-print file provided by the client.

Tracking : temperature/GPS tracking solution.

Logo molded into the mass.

Branding marking : engraved aluminum plate 150 x 90 mm

** Average value for reference purposes*



Chilled



Frozen




Ambient



HDPE



ATP

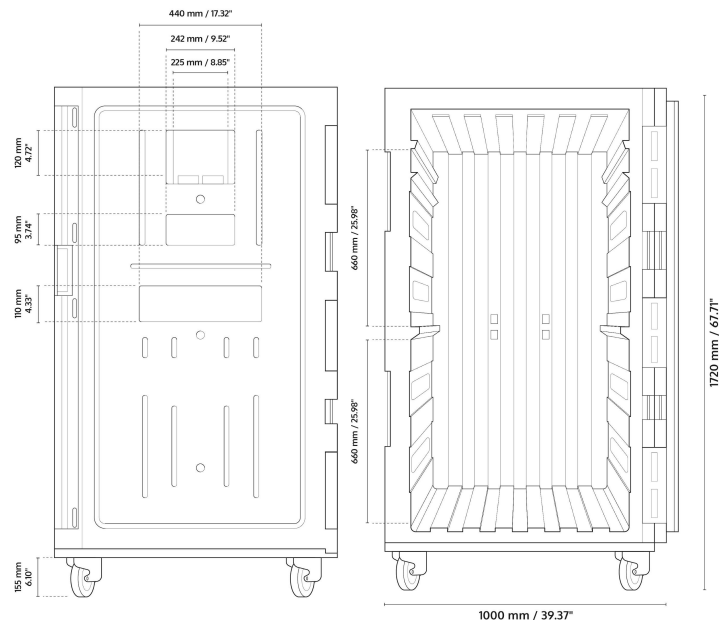

Insulated container properties

Thermal	Coef K.	0.34 W/m ² .°C
	ATP category	IR
	Temperature resistance	-80°C/+70°C
	Double wall thickness	≈ 80 mm
Mechanical	Internal convection grooves	
	Dynamic load capacity	600 Kg
	Static load capacity	1200 Kg
Double-walled, rotational-molded and grooved		

■ Update 26/10/2023