

Roll 550

01002019-xxx OLI-1



**Photo for illustrative purposes*

External dimensions (L x l x h)

660 x 950 x 1855 mm

Internal dimensions* (L x l x h)

468 x 770 x 1528 mm

Internal volume

550 L

Empty weight

100 Kg

Cold source - advices

Eutectic plate : 1 eutectic plate TOP370 all temperature according to the existing Olivo standard.

Dry ice drawer : capacity of 21L, made of aluminium.

Insulated container standard specifications

Box & door :

- **Monobloc wall** in UV-resistant food-grade polyethylene ;
- **Injected polyurethane** foam ;
- **Monobloc EPDM** frame seal ;
- **Sealed lateral Pelican® closure**, yellow zinc coating, ergonomic handling sheath, 2 locking points, and 1 galvanized door stop ;
- **270° door opening** ;
- **Double-axis zinc-plated** box-door hinge ;
- **2 side-handling handles** rotationally molded into the mass ;

Logistical specifications : Cage roll UK

Chassis :

- **Embedded support frame** with yellow zinc coating ;
- **2 swivel wheels**, **2 fixed sandwich** polyamide noise-reducing wheels attached to a plate, diameter 100 mm and height 128 mm.

Accessory options

Brakes : set of 2 polyamide sandwich wheels with brakes, diameter 100 mm (see User Guide) ;

Feet : set of 4 metal feet, diameter 60 mm ;

Intermediate grid : up to 3 steel grids with polyamide coating ;

Customization

Signage : heat-sealed adhesive – ready-to-print file provided by the client.

Tracking : temperature/GPS tracking solution.

Branding marking : engraved aluminum plate 150 x 90 mm

** Average value for reference purposes*




Chilled



Frozen



Ambient

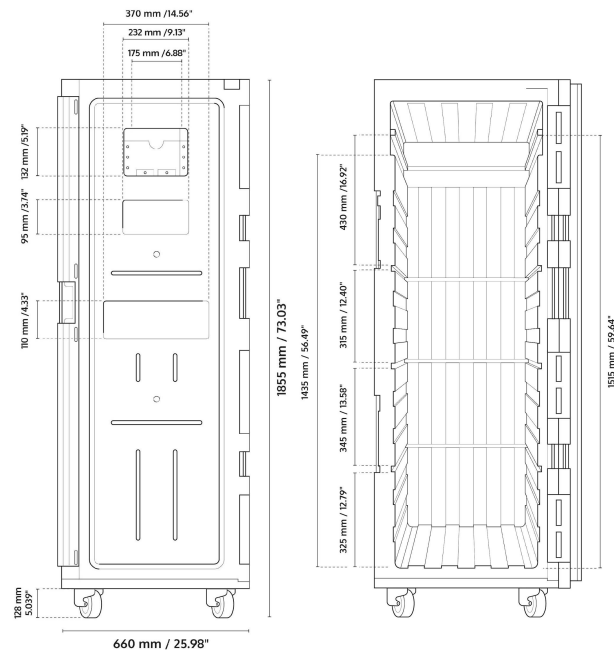

Insulated container properties

Thermal

Coef K.	0.37 W/m ² .°C
ATP category	IR
Temperature resistance	-80°C/+70°C
Double wall thickness	≈ 100 mm
Internal convection grooves	

Mechanical

Dynamic load capacity	480 Kg
Static load capacity	960 Kg
Double-walled, rotational-molded and grooved	

Update 26/10/2023