

Roll 650

01002023-xxx OLI-1



**Photo for illustrative purposes*

External dimensions [L x l x h]

740 x 940 x 1840 mm

Internal dimensions* [L x l x h]

565 x 760 x 1500 mm

Internal volume

644 L

Empty weight

100 Kg

Cold source - advices

Eutectic plate : up to 4 eutectic plates TOP900 all temperature according to the existing Olivo standard.

Dry ice drawer : capacity of 32L, made of aluminium.

SIBER bac : rotomoulded dry ice injection container, mixed chilled and frozen.



Insulated container standard specifications

Box & door :

- **Monobloc wall** in UV-resistant food-grade polyethylene ;
- **Injected polyurethane** foam ;
- **Monobloc EPDM** frame seal ;
- **Sealed lateral Pelican® closure**, yellow zinc coating, ergonomic handling sheath, 2 locking points, and 1 galvanized door stop ;
- **270° door opening** ;
- **Double-axis zinc-plated** box-door hinge ;
- **4 side-handling handles** rotationally molded into the mass ;

Logistical specifications : Cage roll

Chassis :

- **Embedded support frame** with yellow zinc coating ;
- **2 swivel wheels**, **2 fixed sandwich** polyamide noise-reducing wheels attached to a plate, diameter 100 mm and height 128 mm.

Accessory options

Brakes : set of 2 polyamide sandwich wheels with brakes, diameter 100 mm' (see User Guide) ;

Feet : set of 4 metal feet, diameter 60 mm ;

Intermediate grid : up to 3 steel grids with polyamide coating or stainless steel ;

Customization


Signage : heat-sealed adhesive – ready-to-print file provided by the client.

Tracking : temperature/GPS tracking solution.


Logo molded into the mass.

Branding marking : engraved aluminum plate 150 x 90 mm

** Average value for reference purposes*

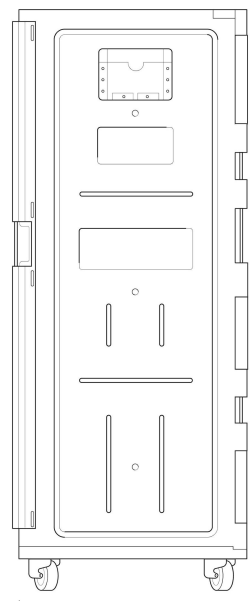

740 mm / 29.13"

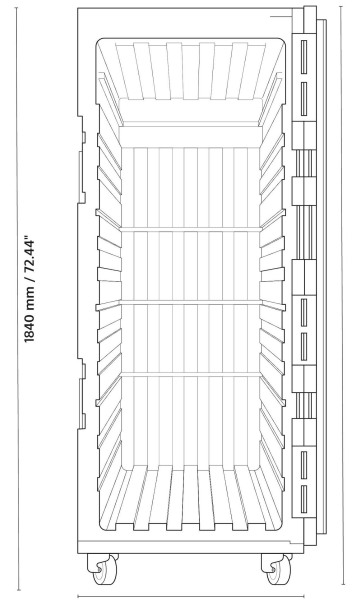

1840 mm / 72.44"

1840 mm / 72.44"

Insulated container properties

Thermal

Coef K.	0.38 W/m2.°C
ATP category	IR
Temperature resistance	-80°C/+70°C
Double wall thickness	≈ 90 mm
Internal convection grooves	

Mechanical

Dynamic load capacity	480 Kg
Static load capacity	960 Kg

Double-walled, rotational-molded and grooved

■ Update 26/10/2023