

# Roll 900 SEA

01002013-xxx OLI-1



\*Photo for illustrative purposes

## External dimensions (L x l x h)

800 x 1200 x 1860 mm

## Internal dimensions\* (L x l x h)

600 x 990 x 1390 mm

## Internal volume

840 L

## Empty weight

142 Kg

## Cold source - advices

**Eutectic plate** : up to 4 eutectic plates TOP900 all temperature according to the existing Olivo standard.

## Insulated container standard specifications

### Box & door :

- Monobloc wall in UV-resistant food-grade polyethylene ;
- Injected polyurethane foam ;
- Monobloc EPDM frame seal ;
- Sealed lateral Pelican® closure, yellow zinc coating, ergonomic handling sheath, 2 locking points, and 1 galvanized door stop ;
- 270° door opening ;
- Double-axis zinc-plated box-door hinge ;
- 2 side-handling handles rotationally molded into the mass ;
- Stainless steel drain plug for water drainage and special rotomolded bottom for water retention.

### Logistical specifications : Euro pallet 800 x 1200 mm

### Chassis :

- Embedded support frame with yellow zinc coating ;
- 2 swivel wheels, 2 fixed sandwich polyamide noise-reducing wheels attached to plate, diameter 125 mm and height 155 mm.

## Accessory options

**Brakes** : set of 2 polyamide sandwich wheels with brakes, diameter 125 mm (see User Guide);

**Feet** : set of 4 metal feet, diameter 80 mm ;

**Intermediate grid** : up to 3 steel grids with polyamide coating or stainless steel ;

## Customization

**Signage** : heat-sealed adhesive – ready-to-print file provided by the client.

**Tracking** : temperature/GPS tracking solution.

**Logo molded into the mass.**

**Branding marking** : engraved aluminum plate 150 x 90 mm

\* Average value for reference purposes



Chilled



Frozen



Ambient



HDPE



Thermal

Mechanical


## Insulated container properties

Coef K.	0.30 W/m <sup>2</sup> .°C
ATP category	IR
Temperature resistance	-80°C/+70°C
Double wall thickness	≈ 90 mm
Internal convection grooves	

Dynamic load capacity	600 Kg
Static load capacity	1200 Kg

Double-walled, rotational-molded and grooved

\*ROLL 900 with SiberSnow® inside

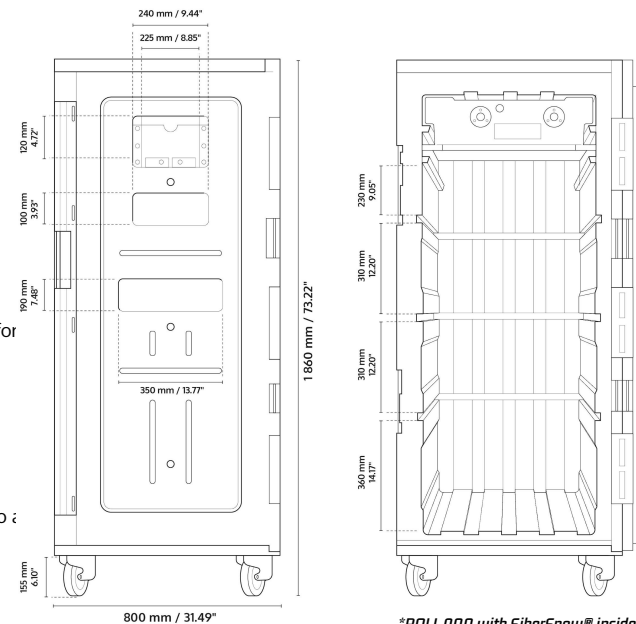

Update 26/10/2023