

# Roll 900

01002013-xxx OLI-1



*\*Photo for illustrative purposes*

## External dimensions [L x l x h]

800 x 1200 x 1860 mm

## Internal dimensions [L x l x h]

600 x 990 x 1490 mm

## Internal volume

885 L

## Empty weight

2127 Kg

## Cold source - advices

**Eutectic plates** : up to 4 eutectic plates TOP900 all temperature according to the existing Olivo standard.

**Dry ice drawer** : capacity of 35L, made of aluminium.

**SIBER bac** : rotomoulded dry ice injection container, mixed chilled and frozen.



## Insulated container standard specifications

### Box & door :

- **Monobloc wall** in UV-resistant food-grade polyethylene ;
- **Injected polyurethane** foam ;
- **Monobloc EPDM** frame seal ;
- **Sealed lateral Pelican® closure**, yellow zinc coating, ergonomic handling sheath, 2 locking points, and 1 galvanized door stop ;
- **270° door opening** ;
- **Double-axis zinc-plated box-door hinge** ;
- **2 side-handling handles** rotationally molded into the mass ;
- **Stainless steel drain plug for water drainage** and special rotomolded bottom for water retention.

Logistical specifications : Euro pallet 800 x 1200 mm

### Chassis :

- **Embedded support frame** with yellow zinc coating ;
- **2 swivel wheels**, **2 fixed sandwich** polyamide noise-reducing wheels attached to a plate, diameter 125 mm and height 155 mm .

## Accessory options

**Brakes** : set of 2 polyamide sandwich wheels with brakes, diameter 125 mm (see User Guide);

**Feet** : set of 4 metal feet, diameter 80 mm ;

**Intermediate grid** : up to 3 steel grids with polyamide coating or stainless steel ;

## Customization

**Signage** : heat-sealed adhesive – ready-to-print file provided by the client.

**Tracking** : temperature/GPS tracking solution.

**Logo molded into the mass.**

**Branding marking** : engraved aluminum plate 150 x 90 mm

*\* Average value for reference purposes*



Chilled



Frozen



Ambient



Thermal

## Insulated container properties


Coef K.	0.31 W/m <sup>2</sup> .°C
ATP category	IR
Temperature resistance	-80°C/+70°C
Double wall thickness	≈ 90 mm
Internal convection grooves	

Mechanical

Dynamic load capacity	600 Kg
Static load capacity	1200 Kg

Double-walled, rotational-molded and grooved

■ Update 26/10/2023

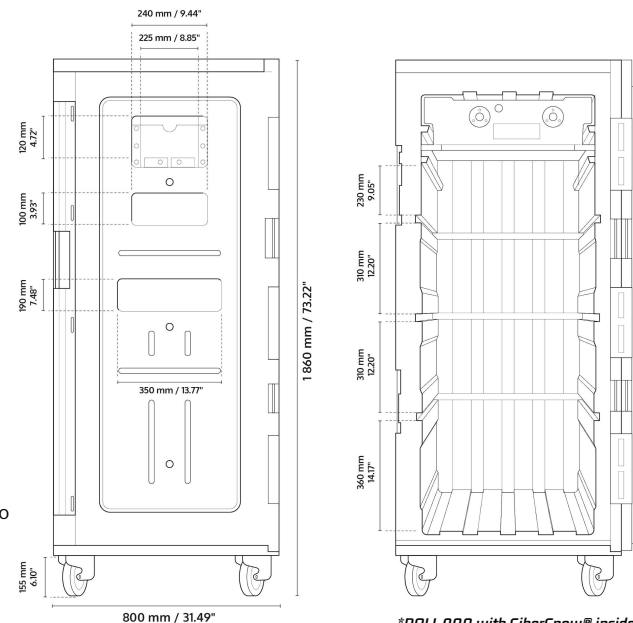

*\*ROLL 900 with SiberSnow® inside*